


Positioning lanyards constructed from 12.5 mm polyamide static rope. Ergonomic squeezeactivated aluminum alloy adjustment device.

Available in a large variety of lengths and configurations to meet the varied needs of workers at height.

NO CONNECTORS

ROOFS


- 203111 2 m
- 203112 5 m
- 203113 10 m
- 203114 20 m

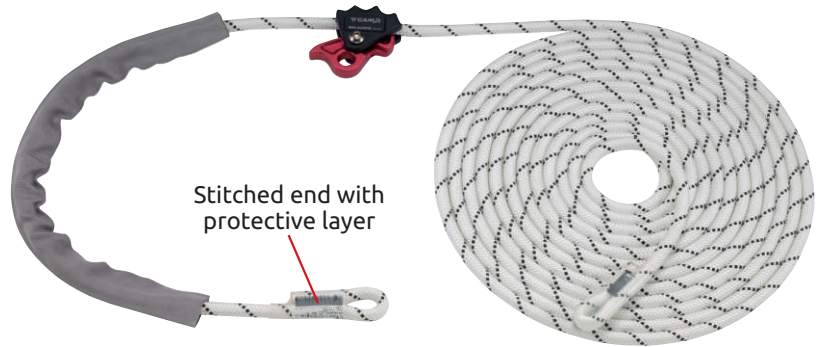

STEEL CONNECTORS

TOWERS/INDUSTRY, CONSTRUCTION

- 203115 + 0981 + 0986 2 m
- 203116 + 0981 + 0986 3 m

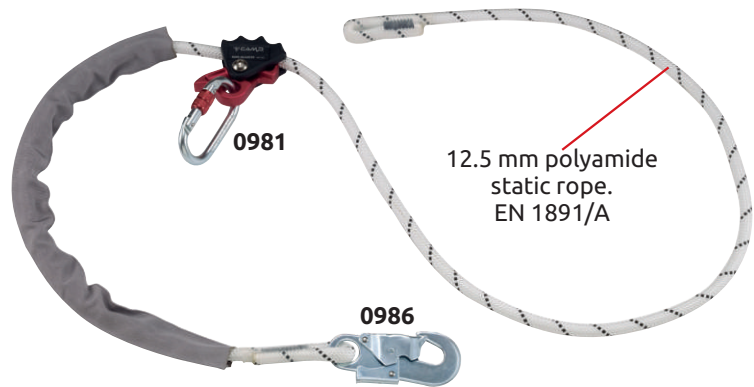

ALU CONNECTORS

ROPE ACCESS, TOWERS/INDUSTRY

- 203119 2 m + 2125 + 0995



Ref.	Product name	Weight		CE EN 358	EAC
		g	oz		
203111	ROPE ADJUSTER 0.5-2 m	525	18.5	•	•
203112	ROPE ADJUSTER 0.5-5 m	1010	35.7	•	•
203113	ROPE ADJUSTER 0.5-10 m	1360	48.0	•	•
203114	ROPE ADJUSTER 0.5-20 m	2420	85.4	•	•
203115	ROPE ADJUSTER + 0981 + 0986 0.5-2 m	915	32.3	•	•
203116	ROPE ADJUSTER + 0981 + 0986 0.5-3 m	1230	43.4	•	•
203119	ROPE ADJUSTER + 2125 + 0995 0.5-2 m	720	25.4	•	•